

DIESEL GENERATOR 585 KVA**50 Hz, 230/400V**

TECHNICAL SPECIFICATIONS



		Standby	Prime
Power	kVa	585	532
Power	kW	468	425
Rated speed	rpm	1500	
Voltage	V	400/230	
Power factor	Cos Phi	0,8	
Open Type (LxWxH)	mm	1600 x 3300 x 1835	
Open Type(Weight)	kg	3720	
Silent Type (LxWxH)	mm	1600 x 4150 x 2550	
Silent Type(Weight)	kg	4400	

Continuous Power

Continuous working power under constant load. The average load value can be 100%. It cannot be overloaded.

Standby Power

Working power in limited time under variable load. With an average load of 70%, it can operate for a total of 200 hours a year. It is used as backup power in mains power outages. Cannot be overloaded.

Prime Power

Continuous working power under variable load. Average load value should be 70%. Every 12 hours 10% can be overloaded.

DIESEL GENERATOR 585 KVA

50 Hz, 230/400V

TECHNICAL SPECIFICATIONS

ENGINE				ALTERNATOR		
Brand	Doosan			Power Factor	0.8	
Model	DP158LD			Rated Power	kW/kVa	468/585
Frequency	Hz	50		Frequency	Hz	50
Standby Power	kW	494		Voltage	V	400/230
Prime Power	kW	450		Connection	3P 4W / Y	
Displacement	lt	14.618		Protection Class	IP21	
Rated Speed	rpm	1500		Insulation Class	H	
Bore x Stroke	mm x mm	128 x 142		Voltage Regulation	±1.0%	
Aspiration	Turbocharged-Intercooler			AVR	AS440	
Cooling Method	Water Cooled			Excitation System	Self Excited	
Type	Direct Injection					
Compression Ratio	15:1					
Number of Cylinders	8 V Type					
Governor Type	Electronic					
Oil Capacity	lt	22				
Coolant Capacity	lt	79				
Fuel Tank	lt	790				
Fuel Consumption	%100	lt	115.1			
	%75	lt	83			
	%50	lt	55.1			

STANDARD FEATURES

- Water cooled diesel engine
- Radiator and mechanical fan
- Protective cage that prevents touching rotating and hot parts
- Electric starter and charge alternator
- Battery, cables and stand
- Flexible fuel connection hoses
- Steel chassis and anti-vibration wedges
- Electronic battery charger
- Operating and installation manual
- Alternator with single bearing and H insulation class
- Industrial capacity muffler and flexible steel compensator
- Engine water heater

SKATPOWER reserves the right to make changes in model, specification, color, equipment and accessories without prior notice. N/A: These dimensions and weights may change depending upon the characteristics of the project

SKATPOWER GENERATOR.

Nerimanov District, Ahmad Rajabli, AZ1052, House: 1969, Baku Azerbaijan

DIESEL GENERATOR 585 KVA

50 Hz, 230/400V

TECHNICAL SPECIFICATIONS


CONTROL SYSTEM

DATAKOM D-300

The D-300 is a cost effective, modern technology genset controller ready for internet monitoring. Its main advantages are multifunctionality, support for multiple topologies, harmonic analysis and detailed power measurements.

Software features are complete with easy firmware upgrade through USB port. The Windows based PC software allows monitoring and programming through USB, RS-232 and GPRS.

The Rainbow Scada web service allows monitoring and control of an unlimited number of gensets from a single central location.

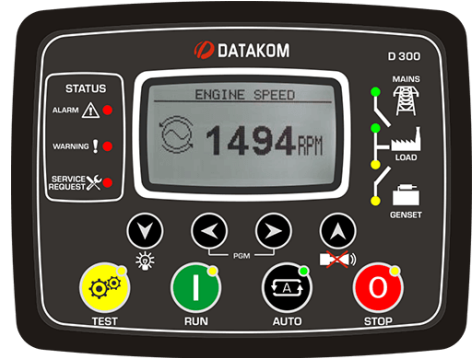

FUNCTIONS	COMMUNICATION	FEATURES	
AMF unit	4-band GPRS modem (optional)	Diesel and gas genset support	Dual mutual standby with equal aging of gensets
ATS unit	USB Device	400Hz operation support	Manual "speed fine adjust" on selected ECUs
Remote start controller	RS-232 (2400-57600baud)	400 event logs, full snapshot	Automatic fuel pump control
Manual start controller	J1939-CANBUS	All parameters front panel editable	Disable protections feature
Engine controller	Geo-locating through GSM	3 level configuration password	Excess power protection
Remote display panel	Internet Central Monitoring	128x64 graphical LCD display	Reverse power protection
	Free PC software: Rainbow Plus	Downloadable languages	Overload IDMT protection
	Modbus RTU	Waveform display of V & I	Load shedding, dummy load
	GPS support (RS-232)	Harmonic analysis of V & I	Multiple load management
		16Amp MCB & GCB outputs	Current unbalance protection
		8 configurable digital inputs	Voltage unbalance protection
		6 configurable digital outputs	Fuel filling & fuel theft alarms
		3 configurable analog inputs	Battery back-up real time clock
		Both CANBUS-J1939 & MPU	Idle speed control
		3 configurable service alarms	Battery charge run enabled
		Multiple automatic exerciser	Combat mode support
		Weekly operation schedule	