

**DIESEL GENERATOR 17.5 KVA****50 Hz, 220/230V**

## TECHNICAL SPECIFICATIONS



		Cos Phi 0,8	Cos Phi 1
Standby Power	kVa	17.5	14
	kW	14	14
Prime Power	kVa	15.10	12
	kW	12	12
Rated speed	rpm	1500	
Voltage	V	220/230	
Open Type (L×W×H)	mm	900 x 1550 x 1100	
Open Type(Weight)	kg	580	
Silent Type (L×W×H)	mm	900 x 2000 x 1310	
Silent Type(Weight)	kg	710	

**Continuous Power**

Continuous working power under constant load. The average load value can be 100%. It cannot be overloaded.

**Standby Power**

Working power in limited time under variable load. It is used as backup power in mains power outages. Cannot be overloaded.

**Prime Power**

Continuous working power under variable load. Average load value should be 70%. Every 12 hours 10% can be overloaded.

# DIESEL GENERATOR 17.5 KVA

50 Hz, 220/230V

## TECHNICAL SPECIFICATIONS

ENGINE			
Brand	YANGDONG		
Model	YD480D		
Frequency	Hz	50	
Standby Power	kW	15	
Prime Power	kW	14	
Displacement	lt	1.809	
Rated Speed	rpm	1500	
Bore x Stroke	mm x mm	80 x 90	
Aspiration	Natural		
Cooling Method	Water Cooled		
Type	Direct Injection		
Compression Ratio	18:1		
Number of Cylinders	4 Inline		
Governor Type	Mechanic		
Oil Capacity	lt	6	
Coolant Capacity	lt	11.3	
Fuel Tank	lt	50	
Fuel Consumption	%100	lt	4.2
	%75	lt	3.15
	%50	lt	2.1

ALTERNATOR		
Phase	1	
Power Factor	1	
Rated Power	Kw/kVa	12/14
Frequency	Hz	50
Voltage	V	220/230
Connection	3P 4W / Y	
Protection Class	IP21	
Insulation Class	H	
Voltage Regulation	±1.0%	
AVR	Yes	
Excitation System	Self Excited	

## STANDARD FEATURES

Water cooled diesel engine  
 Radiator and mechanical fan  
 Protective cage that prevents touching rotating and hot parts  
 Electric starter, charge alternatör and emergency button  
 Battery, cables, stand and tool set  
 Flexible fuel connection hoses  
 Cabin designed with front and rear electric shutters suitable for cold weather conditions

Steel chassis and anti-vibration wedges  
 Electronic battery charger  
 Operating and installation manual  
 Alternator with single bearing and H insulation class  
 Industrial capacity muffler and flexible steel compensator  
 Engine water heater  
 Additional air pump and fuel heater

This generator is capable of operating at an altitude of 3000 meters above sea level

SKATPOWER reserves the right to make changes in model, specification, color, equipment and accessories without prior notice. N/A: These dimensions and weights may change depending upon the characteristics of the project

SKATPOWER GENERATOR.

Nerimanov District, Ahmad Rajabli, AZ1052, House: 1969, Baku Azerbaijan

## DIESEL GENERATOR 17.5 KVA

50 Hz, 220/230V

### TECHNICAL SPECIFICATIONS


## CONTROL SYSTEM

### DATAKOM D-300

The D-300 is a cost effective, modern technology genset controller ready for internet monitoring. Its main advantages are multifunctionality, support for multiple topologies, harmonic analysis and detailed power measurements.

Software features are complete with easy firmware upgrade through USB port. The Windows based PC software allows monitoring and programming through USB, RS-232 and GPRS.

The Rainbow Scada web service allows monitoring and control of an unlimited number of gensets from a single central location.

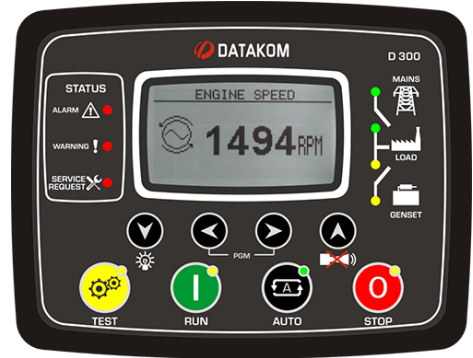

FUNCTIONS	COMMUNICATION	FEATURES	
AMF unit	4-band GPRS modem (optional)	Diesel and gas genset support	Dual mutual standby with equal aging of gensets
ATS unit	USB Device	400Hz operation support	Manual "speed fine adjust" on selected ECUs
Remote start controller	RS-232 (2400-57600baud)	400 event logs, full snapshot	Automatic fuel pump control
Manual start controller	J1939-CANBUS	All parameters front panel editable	Disable protections feature
Engine controller	Geo-locating through GSM	3 level configuration password	Excess power protection
Remote display panel	Internet Central Monitoring	128x64 graphical LCD display	Reverse power protection
	Free PC software: Rainbow Plus	Downloadable languages	Overload IDMT protection
	Modbus RTU	Waveform display of V & I	Load shedding, dummy load
	GPS support (RS-232)	Harmonic analysis of V & I	Multiple load management
		16Amp MCB & GCB outputs	Current unbalance protection
		8 configurable digital inputs	Voltage unbalance protection
		6 configurable digital outputs	Fuel filling & fuel theft alarms
		3 configurable analog inputs	Battery back-up real time clock
		Both CANBUS-J1939 & MPU	Idle speed control
		3 configurable service alarms	Battery charge run enabled
		Multiple automatic exerciser	Combat mode support
		Weekly operation schedule	